

Krylex KU5962 UV Curable Adhesive

Product Description

KRYLEX KU5962 is a fast curing, high-clarity light cure adhesive formulated for strong adhesion to many substrates. It has a Newtonian viscosity that allows for easy automatic dispensing. The product has blue fluorescence under a black light, facilitating easy onpart inspection of bond areas. KRYLEX KU5962 is solvent free and has excellent stability.

Product Features


- Medium viscosity
- Instant cure with UV light
- ISO10993 approved
- Excellent multi-substrate adhesion
- Transparent color
- Solvent Free, UrethaneAcrylate

Typical Applications

- Needle bonding
- Medical potting and doming
- General assembly

Curing Notes

- Instant UV cure

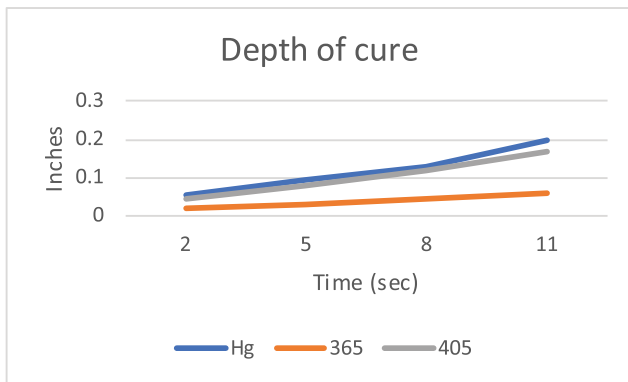

*All lights had an intensity of 100mw/cm²

Typical Uncured Properties

PROPERTY	VALUE	TEST METHOD
Color	Transparent	N/A
Viscosity (cps)	300	Brookfield DV2T
Specific Gravity	1.03	ASTMD1875
Shelf Life (mins)	6 M	N/A

*minimum amount of time after adhesive is dispensed for building green strength (handling strength, 50 psi)

Typical Cured Properties

PROPERTY	VALUE	TEST METHOD
Tensile Modulus, MPa	624	ASTM D638
Elongation, %	5.1	ASTM D638
TensileStrength, N/mm ²	18	ASTM D635
Durometer Hardness Shore D	75	ASTM D2240
Water Absorption, 24hr 25°C, %	3.7	ASTM D570
Water Absorption 2hr 100°C, %	1.4	ASTM D570
Fixture Time Glass/Glass	<3 sec.	CSTM 1002
Blue Fluorescence under black light	Yes	CSTM 1003

Adhesion Guide

Substrate	Recommendation
PC polycarbonate	O
PMMA polymethyl methacrylate	O
PVC polyvinyl chloride	O
PET polyethylene terephthalate	O
PS polystyrene	O
ABS acrylonitrile-butadiene-styrene	O
TPU Thermoplastic Polyurithane	O
PE polyethylene	ST
PP polypropylene	ST
Aluminum	O
Stainless Steel	O
Glass	O

O : Recommended Adhesive L: limited Applications ST: Surface Treatment such as Corona, Plasma, etc.

Curing Guide

Fixture time is defined as the time to develop a shear strength of 0.1 N/mm² (14.5psi) between two glass slides.

- Black light, 365nm, 6mW/cm² o <3second

Tack-free time is defined as the time required to produce a tack free surface on the material.

- UVA Lamp, 100mW/cm²
 - o 10 seconds

Directions for Curing

1. KU5962 is sensitive to moisture. Store in moisture resistant container.
2. Do not exceed temperatures above 120°C and pressure above 60 psi during dispense. Use only dry air or Nitrogen during dispense
3. All bond surfaces should be clean and free from grease, mold release or other contaminants.
4. Cure speed is dependent on the heat and humidity levels, the moisture transmission of substrate and required depth of cure.
5. Bonded parts should be allowed to cool before testing or subjecting to any service loads.
6. Plastic grades and part design should be considered to avoid cracking and improve adhesion.
7. Avoid over-heating or applying excess pressure during dispense process.

Handling and Safety

For maximum shelf life, keep containers sealed and store in dry conditions. Keep out of the reach of children. Uncured adhesive contains free isocyanates and it's very important to follow the safety and handling guidelines. Use heat resistant gloves for handling hot syringes. Appropriate eye wear and protective equipment is required during the usage of uncured material. Refer to SDS for further information.

Notes

All the test data, recommended procedures and other statements contained herein are furnished for information only and accuracy of the information is not guaranteed. Chemence cannot assume responsibility for the results obtained by others over whose methods we have no control. It is the user's responsibility to determine suitability for the user's purpose of any production methods mentioned herein and to adopt such precautions as may be advisable for the protection of property and of persons against any hazards that may be involved in the handling and use thereof. In light of the foregoing, Chemence specifically disclaims all warranties expressed or implied, including warranties of merchantability or fitness for a particular purpose, arising from sale or use of Chemence's products. Chemence specifically disclaims any liability for consequential or incidental damages of any kind, including lost profits. The discussion herein of various processes or compositions is not to be interpreted as representation that they are free from domination of patents owned by others or as a license under any Chemence patents that may cover such processes or compositions. We recommend that each prospective user test his proposed application before repetitive use, using this data as a guide. This product may be covered by one or more United States or foreign patents or patent applications.